


1kVA TRANSFORMER

Step-Up or Step-Down Transformers

Application shot

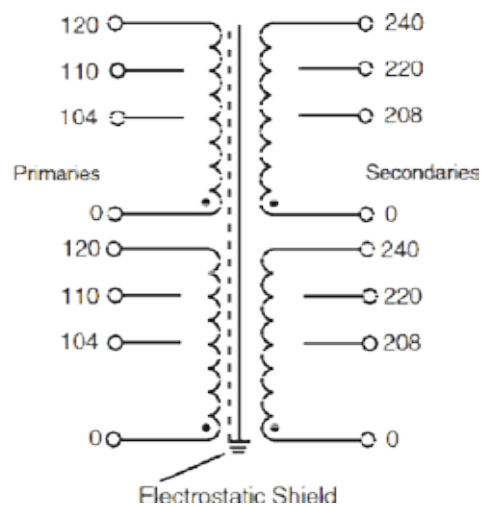

Features:

- Power -1kVA
- Frequency -50/60Hz
- Dielectric strength - 2500Vrms
- Terminals - Plated brass screw terminals
- Insulation class is 130°C standard, higher insulation classes are available.
- Primaries: Dual/tapped:
 - Parallel connected (104V, 110V, 120V)
 - Series connected (208V, 220V, 230V, 240V)
- Secondaries: Dual/tapped
 - Parallel connected (208V, 220V, 240V)
 - Series connected (416V, 440V, 460V, 480V)
- Secondaries: Dual/tapped
 - Parallel connected (208V, 220V, 240V)

As shown in the schematic diagram this line of Espey products has dual primaries and secondaries. All four windings are identically rated so to permit series or parallel connections on either primary or secondary

This unit also allows the user to make auto-transformer connections by connecting a primary group in series with a secondary group.


Filter Inductor

Specifications:

ELECTRICAL SPECIFICATIONS

RATING	1kVA, 50/60Hz, SinglePhase
VOLTAGE	440VAC, 50/60 Hz, to 220VAC
DIELECTRIC STRENGTH	2500 VAC, 60Hz, winding to core and case for 1minute
DUTY	Continuous

MECHANICAL SPECIFICATIONS

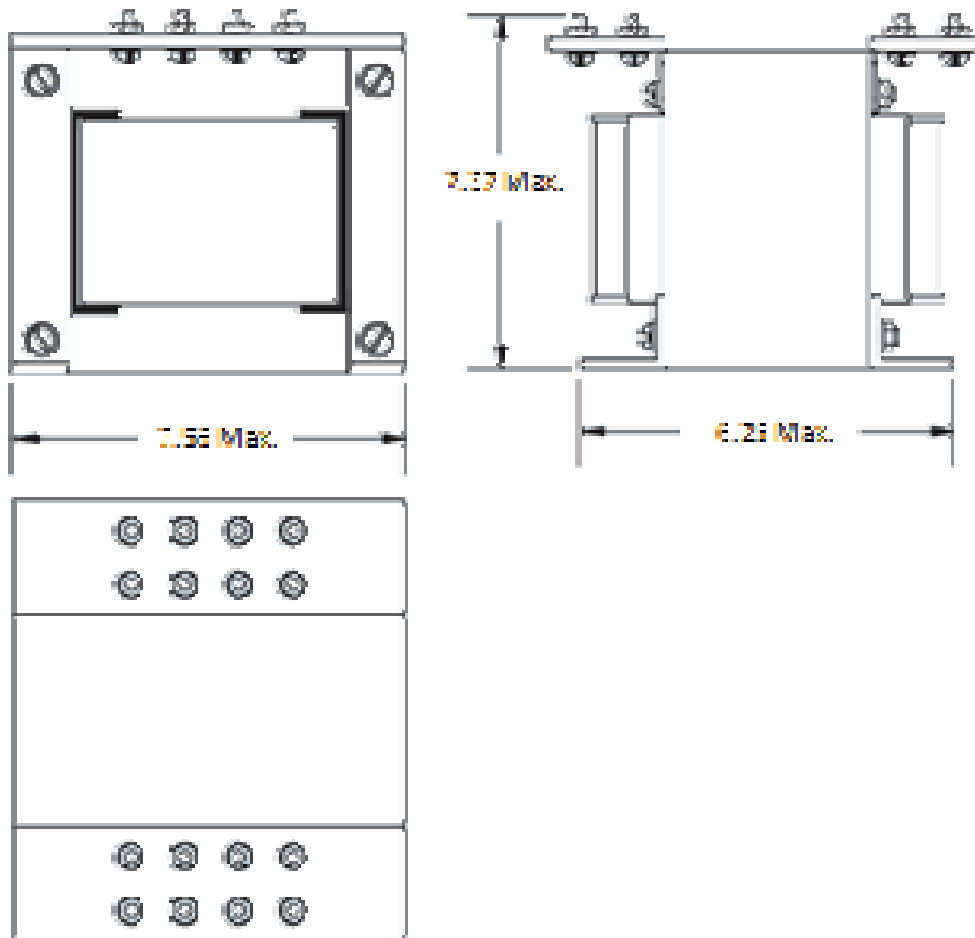

1kVA XFMR